


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 28 TOWNSHIP 16 RANGE 4
DATE: --6-8-03- 2-24-04
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 2-13-97

IN. S.P.C. E ZONE NAD '83
NAME: 16042801
N: 506597.6910(m)
E: 62675.1360(m)

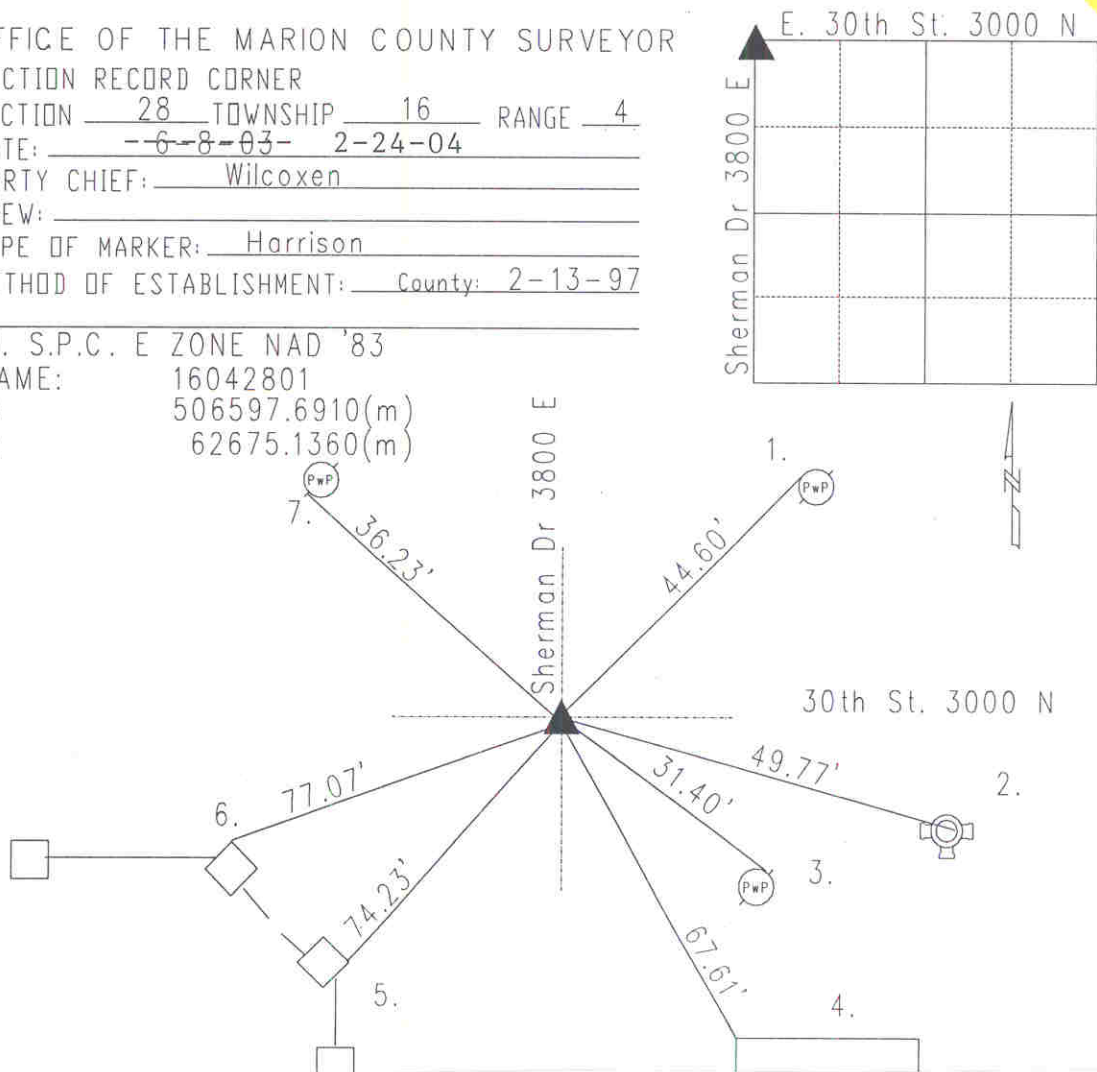

Corner originally set in 1820 as a post by John Hendricks with the following witnesses: 20"elm bearing south 66 degrees, thence west 16 links; and a 5" sugar bearing north 29 degrees, thence east 17 links. (M.C. Atlas p. 11) A survey by D.B. Hasbrook on April 9, 1852 indicates no stone but the following witnesses: 9" oak bearing north 39.50 degrees, thence west 55 links; and a 12" elm bearing north 44.50 degrees, thence east 131 links. (Center Legal Book p. 14) A survey by D. B. Hasbrook on March 14, 1854 indicates no stone but the following witnesses: 6" ash bearing north 23.75 degrees, thence east 57 links; and a 6" ash bearing north 10.50 degrees, thence west 55 links. (Center Legal Book p. 2) A survey by D. B. Hasbrook on April 4, 1856 indicates the same witnesses as above. (Center Legal Book p. 3) Corner referenced by Wilcoxon on 11/30/87 and called a p.k. Nail. Corner referenced by Kiste on 2/13/97 and called a p.k. Nail. Corner excavated on 5/21/03 by Kiste and a p.k. Nail was found at surface. No other monuments were found. A #205 cast iron Harrison Monument was set in position as the corner.

REF.	DISTANCE	DESCRIPTION
1.	44.60'	PK nail W PwP no# 4"up
2.	49.77'	Top nut of fire hydrant
3.	31.40'	PK nail NE PwP#50-442 B 4"up
4.	67.61'	NW corner of stone building
5.	74.23'	Easterly corner of brick fence column (for Fire Dept #10)
6.	77.07'	Northerly corner of brick "
7.	36.23'	PK nail SW PwP no # 10"up